



# Baby Einstein Take Along Tunes Battery Socket Replacement

The metal part that the batteries connect to is faulty and the guide shows steps to replace it

Written By: Shreya Sunny



## INTRODUCTION

In this guide, you will learn how to replace the battery terminals



### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
- [Metal Spudger](#) (1)
- [Precision Tweezers Set](#) (1)
- [iFixit Opening Tools](#) (1)



### PARTS:


- [Battery Terminal](#) (1)
-

## Step 1 — Battery Socket



- Set the device on it's face with the back facing up.

## Step 2

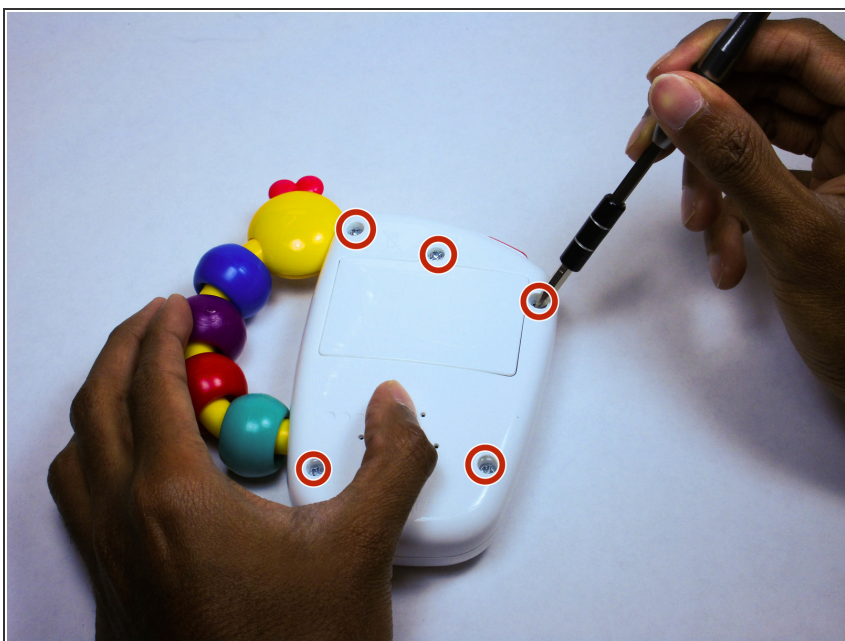

- Begin by removing all highlighted screws with a using a Phillips #1 Screwdriver.



### Step 3




- Remove the battery plate with a plastic opening tool and set it aside.

### Step 4




- Remove each battery with a plastic opening tool and set them aside.

## Step 5

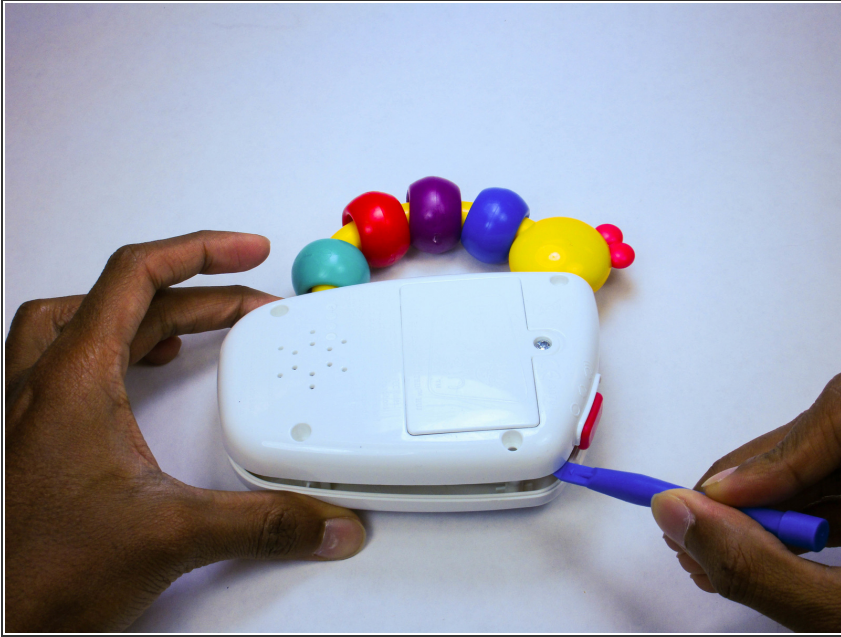


- Separate the device in two parts by using the plastic opening tool.

## Step 6

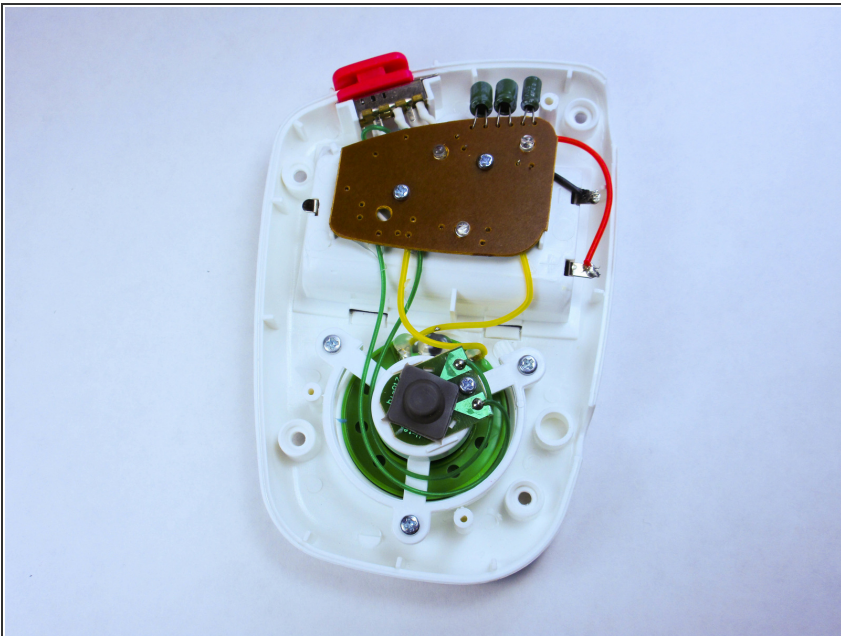


- Remove the top piece and place it aside, keeping the bottom half with the mechanics.

## Step 7

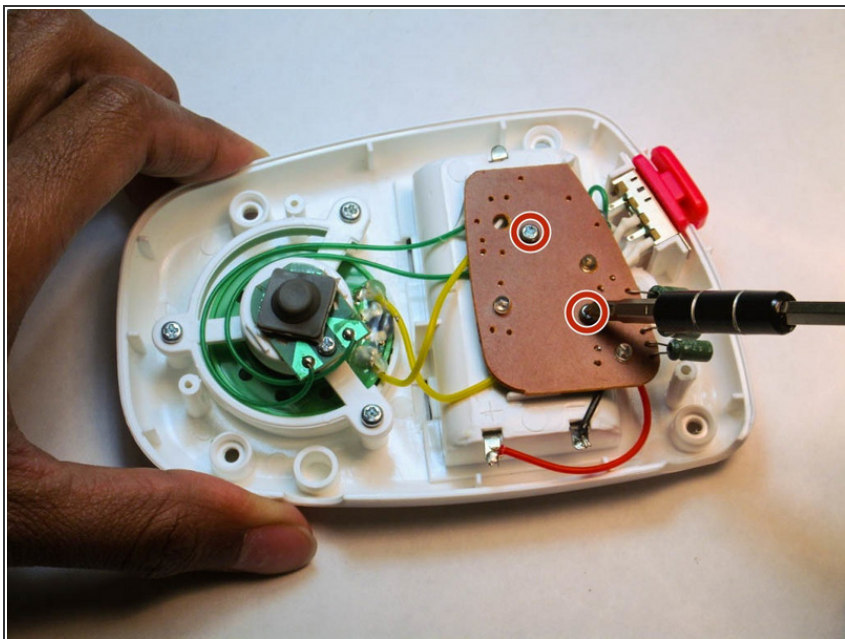

- Remove the highlighted screws using a Phillips #1 Screwdriver.


## Step 8

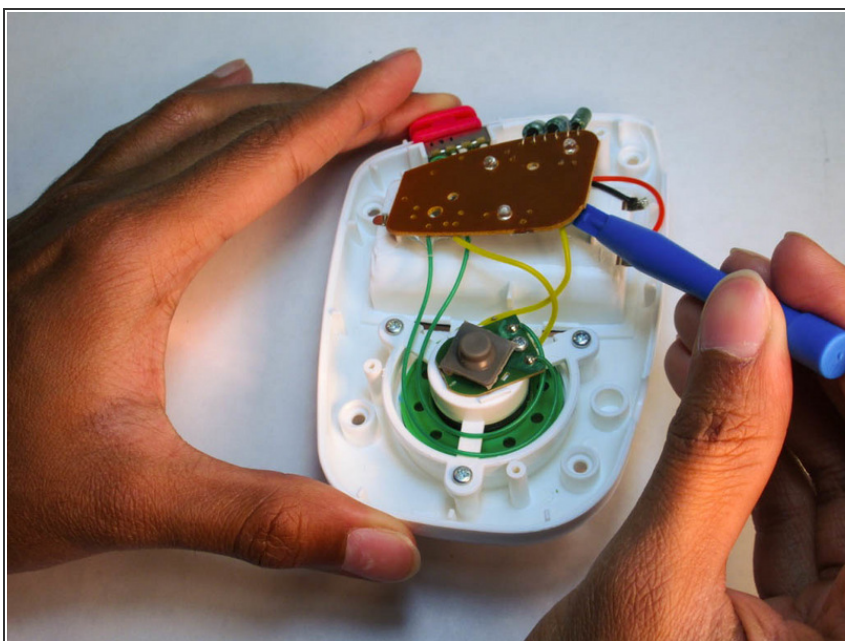

- Use the plastic opening tool and carefully set the LED panel to the side, exposing the wires underneath.





## Step 9

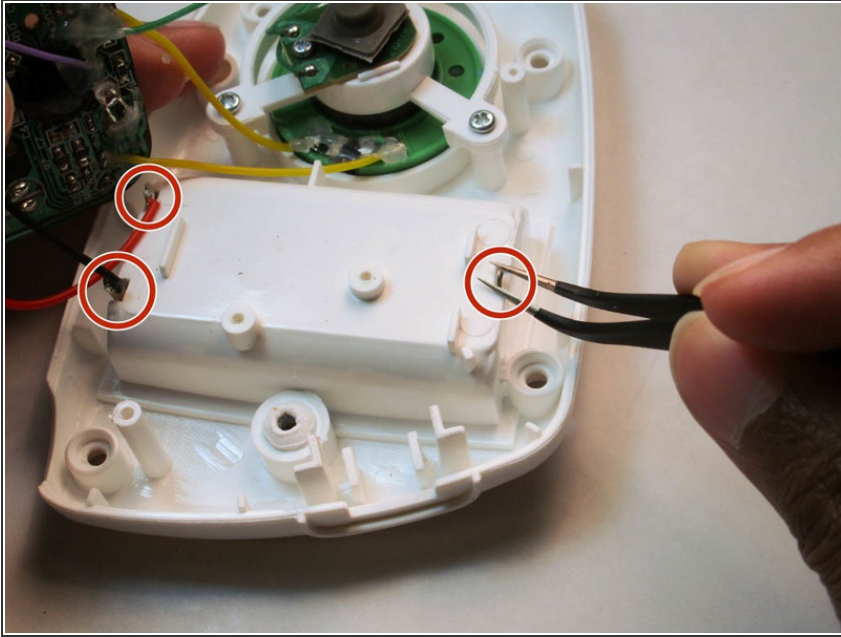


- With the precision tweezers, straighten the metal connectors to remove the terminals from the other side.

## Step 10

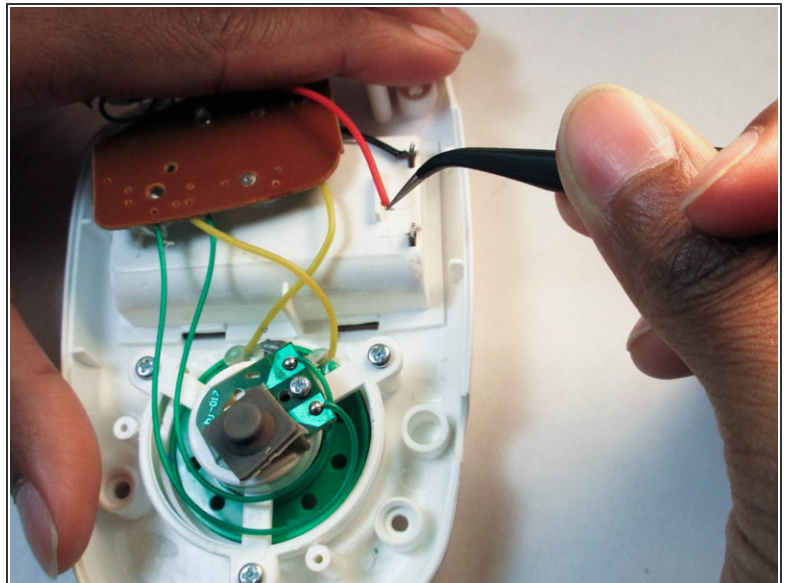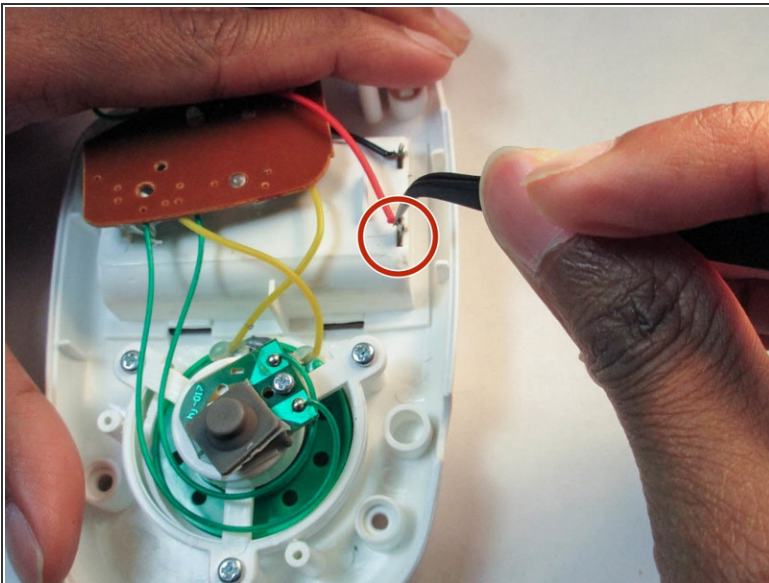


- Sever the red wire from the metal connector with the precision tweezers.

## Step 11

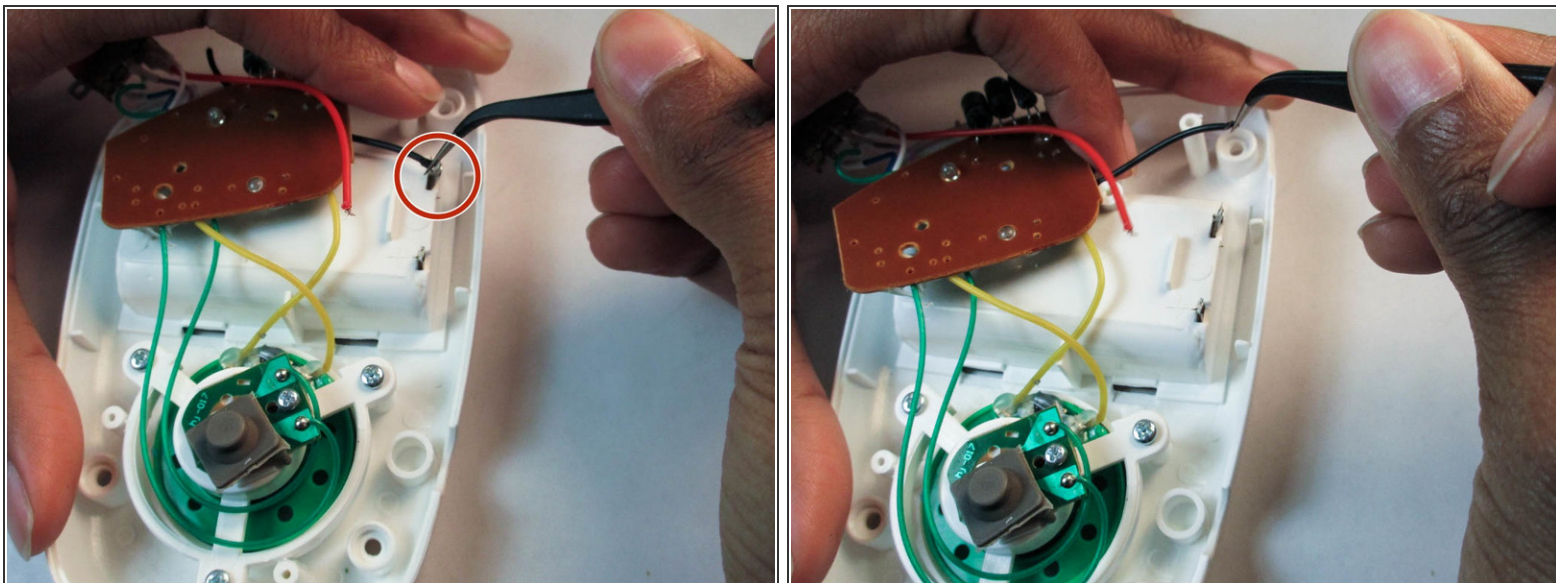

- Sever the black wire from the metal connector with the precision tweezers.

## Step 12

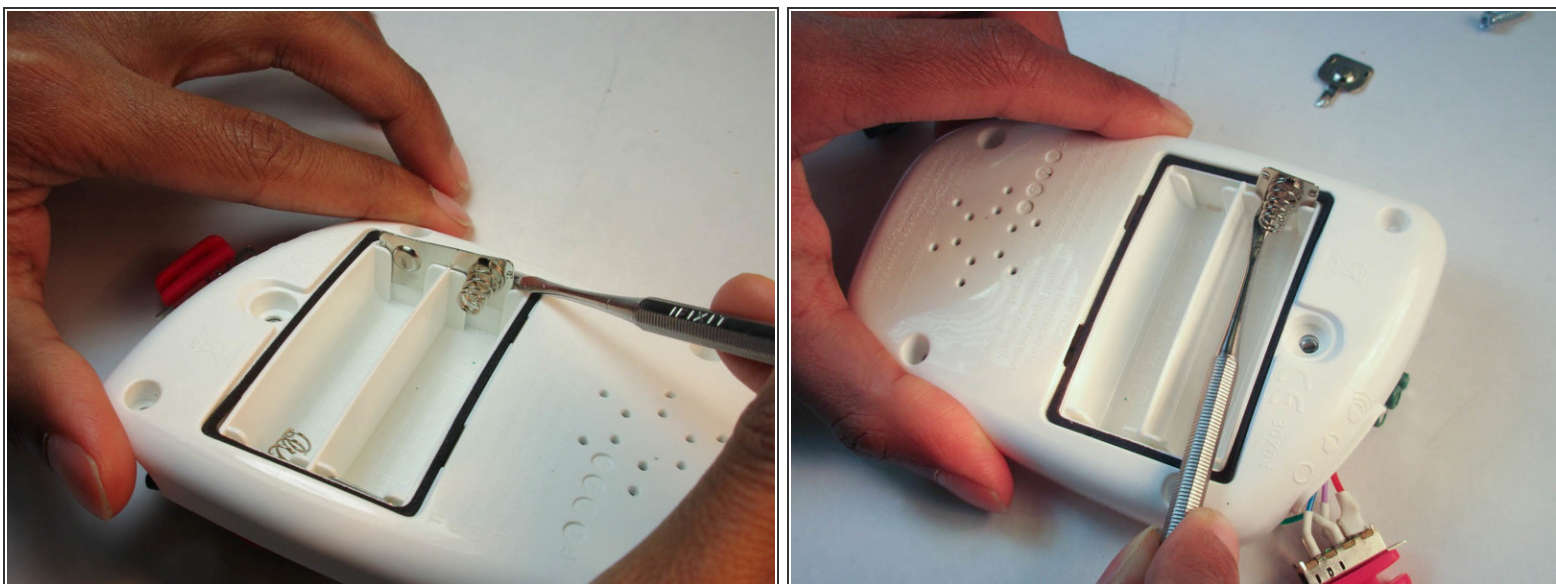

- Flip the device on its face and remove the battery terminals with a metal spudger.

To reassemble your device, follow these instructions in reverse order.



